

QD range

INTERMITTENT AXIAL EXTRACT FANS



APPLICATION

Ideal for air-extraction in bathroom, toilet and small/medium premises. Suitable to extract stale air directly to the outside or through short length ducting. Units can be wall/panel, ceiling and window mounted.

SPECIFICATION

Casing made of high quality ABS provides long lasting shock-proof and robust construction. The unit is finished in white RAL 9010 and are UV resistant.

Unique design winglet-type impeller, providing enhanced aerodynamic properties, low noise and increased efficiency.

Single-phase induction motors with integral thermal protection, mounted on sealed for life high quality sleeve bearings. Suitable for continuous and intermittent running.

FEATURES & BENEFITS

IPX4 protection degree

Aesthetic front flat cover for modern interior design easily removed for cleaning.

Rigid optimised spigot support preventing distortion with strengthened guard and design to maximise airflow.

Integral back-draught shutter on request to prevent air flowing back into the room when the fan is off.

Low power consumption: 100mm model has less than 8 watts operating power consumption for energy saving.

Totally recyclable plastic components, environmentally friendly.

Double insulated: no earth connection is required.

Tested to the latest standards: units are tested in the TÜV Rheinland recognised laboratory at Aerauliqa, meaning accurate, up to date information on electrical safety, performance and noise level that can be relied upon. Designed and manufactured in accordance with EN60335-2-80 (Low Voltage Directive) and the EMC Directive (Electromagnetic Compatibility).

VERSIONS

Standard

The fan is operated via a separate ON/OFF switch or the light switch.

Run-on timer

The fan is equipped with a timer circuit adjustable from $\pm 1'$ to 25'. Operation: after switching off, the fan continues to run for the pre-set period of time.

Humidistat & timer

The fan is provided with an electronic circuit having a humidity sensor on board (adjustable from 50% to 95% RH) and a timer, adjustable from $\pm 1'$ to 25'. Operation: when the percentage of relative humidity is higher/lower than the pre-set threshold, the fan is automatically activated/deactivated. After switching off, the fan continues to run for the pre-set period of time.

Pull cord

The fan is operated via the integrated ON/OFF pull cord switch.

Humidistat-timer-pull cord

The fan is provided with an electronic circuit having a humidity sensor on board (adjustable from 50% to 95% RH) and a timer, adjustable from $\pm 1'$ to 25'. Operation: when the percentage of relative humidity is higher/lower than the pre-set threshold, the fan is automatically activated/deactivated. After switching off, the fan continues to run for the pre-set period of time. The integrated pull cord switch activates/deactivates the fan manually.

OPTIONS

Ball bearing motor type to assure a longer fan life (30.000h): ideal for cold climates.

Different voltage and frequency motors can be offered to meet specific needs.

APPLICATIONS & MODEL VERSIONS

Model	Location	S	PC	T	HT	HTPC
QD100	Bathroom	•	•	•	•	•
QD120	Utility	•	•	•	•	•
QD150	Kitchen	•	•	•	•	•

S- Standard, PC- Pull cord, T- Run on timer, HT- Humidistat/Timer, HTPC- Humidistat/Timer/ Cord.

QD range



Performance

Model	QD100	QD120	QD150
Air flow m ³ /h max	83	140	253
Static pressure Pa max	27	40	51
Power W max	8	14	24
Sound Pressure dB(A) @3m	26	34	42
Ambient temperature °C max	50	50	50
Marking	CE	CE	CE

- rated 220-240 V ~ 50-60Hz
- air performance measured according to ISO 5801 at 230V 50Hz, air density 1,2 Kg/m³
- data measured in the TÜV Rheinland recognised laboratory in Aerauliqa.
- product certified by TÜV Rheinland




Safety
Electromagnetic
Compatibility
Regular Production
Surveillance




www.tuv.com
ID 0000040225

Curves

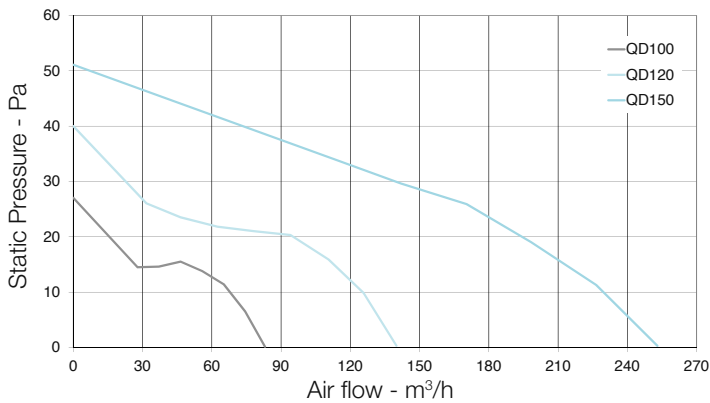

Dimensions (mm)

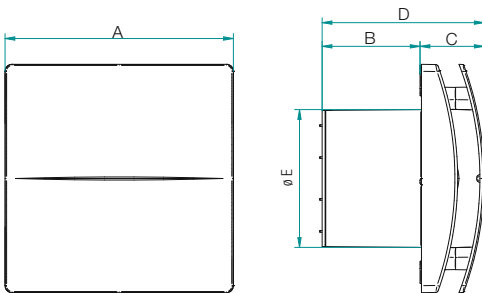

Code	QD100	QD120	QD150
A	164	184	218
B	70	81	97
C	46	48	52
D	116	129	149
Ø E	99	119	148

Installation

